




KONEKTORY
TERMINAL BLOCKS FOR P.C.B.
BARRETTES DE CONNEXION POUR C.I.
ANSCHLUßKLEMMEN FÜR LEITERPLATTE

TYP
 TYPE
 TYPE
 TYP

CPF

MODUL
 PITCH
 PAS
 RASTERMAß

5 5,08 10 10,16 mm

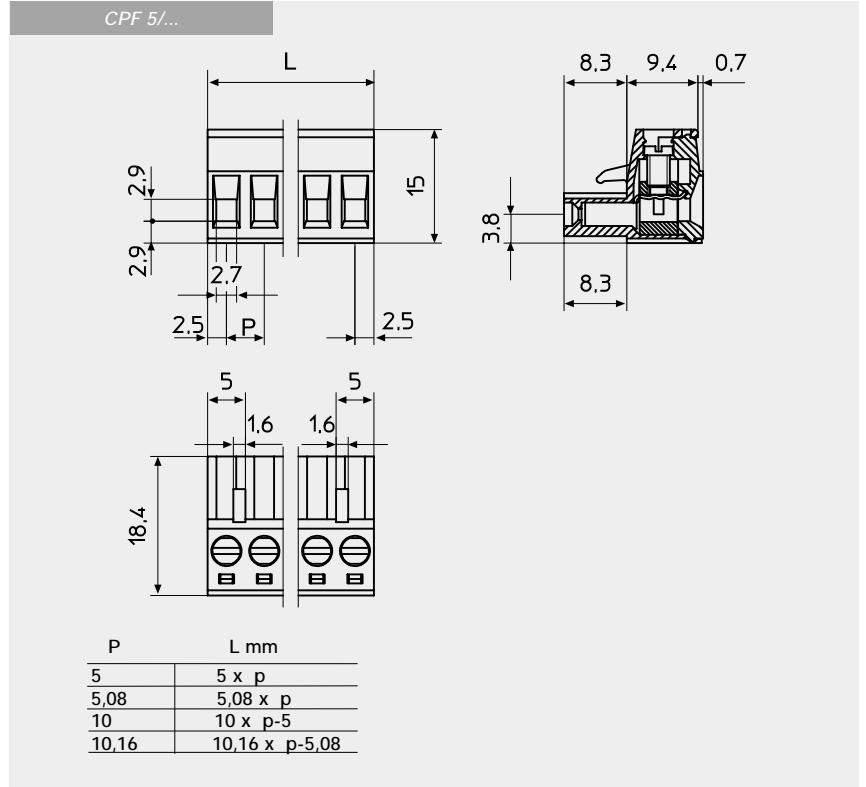

ZÁSUVKOVÉ KONEKTORY
 MODULOVÉ

FEMALE CONNECTOR
 MODULES

CONNECTEUR FEMELLE
 ELEMENTS

BUCHSENLEISTE
 ANREIHBAR



Izolačné telo svorky zelené	Insulating body Green	Corps isolant Vert	Isolierkörper Grün	P68 UL94VO
Skrutka	Screw	Vis	Schraube	M3-C8R+Zn
Svorka	Clamp	Borne	Klemmkörper	Cu Zn40 Pb2+Ni
Kontakt	Pin	Contacte	Kontakt	CuSn7+Sn
Dotahovací moment	Testing torque	Couple de serrage	Zul. Drehmoment	0,5 Nm
Prierez	Section	Section	Querschnitt	2,5 mm ²
Skrutka zaistená	Captive screw	Vis imperdable	Schraube unverlierbar	-
Nominálny prúd	Nominal current	Courant nominal	Strombelastbarkeit	12 A
Prevádzkové napätie	Voltage	Tension	Betriebsspannung	450/750 V
Teplota	Temperature	Température	Temperatur	85°C
Trieda krytia	Protection index	Degré de protection	Schutzklasse	IP00
Izolačný odpor	Insulation resistance	Résistance d'isolement	Isolationswiderstand	≥ 5 MΩ
Odolnosť proti prierazu	Dielectric strength	Rigidité diélectrique	Durchschlagsfestigkeit	≥ 2500 Vac/60"

Ref. EN 60998-1

OBJEDNÁVACÍ VZOR	ORDER SCHEME	TABEAU DE COMMANDE	BESTELLSCHEMA
	P	p	
	Modul	Počet pólov	Potlač
	Pitch	Nr. of Poles	Printing
	Pas	Nb. Pôles	Marquage
	Rastermaß	Polzahl	Bedruckung
	5	MIN 2=MAX 24	
	5,08		
	10	MIN 1=MAX12	
	10,16		
CPF /	NU